


## Mitsubishi Pajero Audio Wiring Diagram – NM/NP

### Audio Wiring Diagram

1. Grey/Red	SPEAKER - Rear Right (-)
2. Yellow/Red	SPEAKER - Rear Right (+)
3. Grey/Blue	SPEAKER - Rear Left (-)
4. Yellow/Blue	SPEAKER - Rear Left (+)
5. Blue/White	BLANK
6. Pink	AERIAL
7. <b>Blue</b>	<b>SWITCHED 12V POWER</b>
8. <b>Red/Black</b>	<b>CONSTANT 12V POWER</b>
9. Green/White	ILLUMINATION
10. Black/Yellow	DIMMER
11. White/Blue	SPEAKER - Front Left (+)
12. Black/Blue	SPEAKER - Front Left (-)
13. White/Red	SPEAKER - Front Right (+)
14. Black/Red	SPEAKER - Front Right (-)

### **BACK** (Wiring Side)

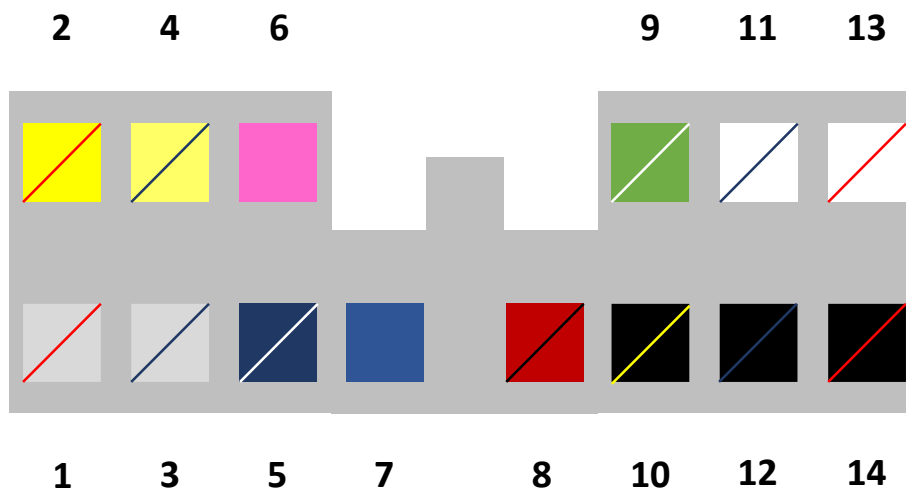

### IMPORTANT NOTICE:

Information contained in this document is a guide only! Please double check part numbers, specifications, owner's manual or a licensed technician **BEFORE** commencing work.